

# **EWS100**

# WIRELESS LAN CONTROLLER




## **INTRODUCTION**

The EWS100 is an entry-level wireless LAN controller that provides enterprise-grade functionality for SMBs, retail/chainstores, and distributed sites. With AP management, user authentication, policy assignment, traffic shaping, firewall features all packaged into a single box, the EWS100 allows smaller organizations with minimal IT resources to enable the same level of network security and management capabilities as their large enterprise counterparts. The EWS100 is extremely affordable, easy to deploy, and simple to manage, making it the ideal choice for SMBs needing a comprehensive Wi-Fi solution.

The EWS100 is capable of managing up to 10 EAP/OAP-series Wireless Access Points, which can be deployed and configured easily by anyone, including non-wireless savvy users. For example, automated AP discovery prevents network administrators from having to go through the hassle of individually adding and configuring each access point. Access points as well as connected Wi-Fi devices can then be monitored and managed from a centralized point, with extensive logging & reporting features to assist in troubleshooting and maintenance.

As Wi-Fi enabled handheld devices such as smartphones and tablets become ever so prevalent in our daily lives, businesses and network operators alike are faced with a mind-boggling dilemma – how to simultaneously address the needs of BYOD (Bring Your Own Device), manage Wi-Fi users, and maintain network service quality for mission critical applications. The EWS100 is designed exactly with these requirements in mind, and with a total cost of ownership that satisfies even the most price conscious, organizations are guaranteed to receive an unmatched ROI on their wireless LAN infrastructure.

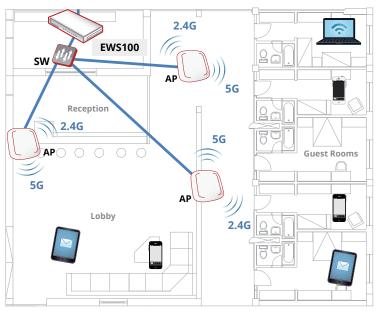

### **FEATURES**

#### **SECURITY**

Security is often one of the most important concerns when it comes to enterprise wireless networks. From the most basic need of preventing network access by unauthorized users to performing rogue AP detection and enforcing network isolation, the Edgecore controllers provide a complex set of features that prevent malicious activities in an organization's network.

For deployment flexibility, the Edgecore controllers support user authentication via both the industry standard 802.1X as well as web-based captive portals. The highly customizable captive portals with integrated walled garden capability can be adapted to suit the needs of hotels, schools, and other public venues. For unregistered users without an account, guest access can be provided by simply entering an e-mail address, logging in with social media accounts, or purchasing a data plan through PayPal.

With various account generation methods, the Edgecore controllers are able to identify users and track user activities, ensuring network security in public Wi-Fi.

The Edgecore controllers also support remote access via VPN, which is crucial for travelling businessmen. At the same time, site-to-site VPN establishes secure connections between corporate headquarters and branch offices.

USER SECURITY	
Authentication Types	<ul><li>* 802.1X</li><li>* UAM (browser-based)</li><li>* IP or MAC-based</li></ul>
Authentication Servers	<ul> <li>Local</li> <li>On-Demand</li> <li>Guest</li> <li>RADIUS</li> <li>LDAP</li> <li>NT Domain</li> <li>SIP</li> <li>POP3</li> </ul>
<b>Customizable Captive Portal</b>	* Yes
Customizable Wild Card Walled Garden	* Yes
User Blacklisting	• Yes
ACCOUNT GENERATION	
On-demand Account	<ul> <li>SMS registration</li> <li>Purchase via PayPal</li> <li>Hotel PMS integration</li> <li>Selectable Billing Plans</li> <li>Keypad-based Account Ticket Printer</li> </ul>

Guest Wi-Fi Account	<ul> <li>Limitation by duration</li> <li>Configurable reactivation time</li> <li>E-mail registration and activation</li> </ul>
Social Media Login	* Yes
NETWORK SECURITY	
VPN	<ul><li>Remote</li><li>Local</li><li>Site-to-Site</li></ul>
Tunneling Protocols	IPSec     PPTP
Network Isolation	<ul><li>Intra-VLAN or Port</li><li>Inter-VLAN or Port</li></ul>
Rogue AP Detection	* Yes
Certificates	Built-in Root CA

#### **MOBILITY**

The advent of the era of smartphones and tablets has opened a chasm between how the Internet is used and how organizations provide Internet connectivity. Wireless networks have transformed from a luxury to a necessity, in order to support devices that don't have legacy wired capability. Furthermore, additional features need to be provided in order to address the rapidly changing usage behavior.

The Edgecore Controllers support a variety of mobility features that aim to make enterprise Wi-Fi both easier to use and simpler to manage. For example, by supporting fast roaming, users on mobile devices can be on-thego without worrying about interrupted connections. It is also not uncommon to see a single user with multiple handheld devices - with the Edgecore Controller all of the devices can login to Wi-Fi using the same username and password. Finally, mobile-optimized captive portals and ticket-printed QR code automatic login are both easy methods for a user to get online from their mobile device.

DEVICE MOBILITY	
Fast Roaming Between Access Points	• Yes
Cross Gateway Roaming	• Yes
WISPr Smart Client	• Yes
Mobile Device Recognition for Optimized Captive Portal	* Yes
Multiple Device Logins Per Account	• Yes
QR Code Automatic Login	• Yes
Device Plug-and-Play	* Yes

#### **MANAGEMENT**

In a wireless LAN, the Edgecore Controller is the central point of management for network administrators, whether it is monitoring current online users or troubleshooting network connectivity issues. The management console of the Edgecore Controller is a browser-based GUI that is simple and intuitive to operate. From this interface, network administrators can configure traffic shaping profiles, track previous network usage, perform system backup and restore, and much more.

From the user management perspective, one of the core benefits of the Edgecore Controller is its ability to enforce different traffic profiles based on both the location (Service Zone) of the user and the time of access. For example, the profiles applied during work hours can be different from that of during after-work hours. From bandwidth limitations to specific routing rules, network administrators gain fine-grained control over Wi-Fi users.

For access points, Edgecore Controllers support automatic discovery and provisioning, eliminating many repetitive and cumbersome tasks often faced during initial network deployment. Centralized AP configuration and monitoring also greatly reduces maintenance overhead for IT staff.

also greatly reduces maintenant	ce overneda for 11 stant.
SYSTEM MANAGEMENT	
Browser-Based Configuration	• Yes
Administrator Accounts	<ul> <li>Multiple tiered access privileges</li> <li>Monitor each admin's current accessed page</li> </ul>
System Time	<ul><li>NTP synchronization</li><li>Manually configured</li></ul>
System Backup & Restore	• Yes
SNMP	<ul><li>Yes; v2c</li></ul>
Network Utilities	<ul> <li>Yes; built-in packet capture</li> </ul>
AP MANAGEMENT	
Automatic AP Discovery	• Yes
Automatic AP Provisioning	<ul> <li>Yes; template-based</li> </ul>
AP Configuration Backup & Restore	* Yes
AP Firmware Batch Upgrade	• Yes
Tunneled AP Management	<ul> <li>Yes; both L2 &amp; L3 APs</li> </ul>
AP Load Balancing	* Yes
USER MANAGEMENT	
User Policy Assignment	<ul><li>Role-based</li><li>Time &amp; location dependent</li></ul>
Bandwidth Limitation	<ul><li>Yes</li></ul>
Traffic Classification / Remarking	• Yes; 802.1p / DSCP
Stateful Firewall	Yes; each rule with individual enforcement

schedules

Static Route Assignment	* Yes
Concurrent Session Limit	* Yes
IP Address Reassignment	Allow clients to obtain
	different IP addresses
	after authentication

#### **SERVICES**

As wireless networks increasingly become the primary network used by organizations, it is crucial to take into consideration fundamental network services, such as DHCP, NAT, and routing. In addition to providing these functions, the Edgecore Controller also implements the concept of a "Service Zone", which essentially segments the controller into multiple virtual controllers, each with its own associated network services, user policies, authentication settings, etc.

On the reliability end, the Edgecore Controller supports WAN port failover, which helps businesses reduce the chance of network downtime and prevents lost productivity and revenue. Furthermore, load balancing between the WAN ports increases overall performance by alleviating congestion and distributing traffic between the two outgoing links. The Ethernet port allocation option allows network administrators to configure the system for 1 or 2 uplink WAN ports, should there be a need for WAN failover or load balancing.

Finally, the Edgecore Controller provides unique valueadded capabilities, such as a direct integration with Micros Opera PMS that greatly simplifies the overhead of providing managed Wi-Fi in hotels.

NETWORK SERVICES	
Redundancy (High Availability)	* No
Internet Protocols Supported	• IPv4 • IPv6
DHCP Server / DHCP Relay	• Yes
Network Address Translation	• Yes
Built-in HTTP Proxy Server	• Yes
Dynamic Routing	• Yes
Local DNS Records	• Yes
Hotel PMS Integration	Direct interface with     Micros Opera PMS
Integrated Billing & Accounting System	* Yes
Billing Quota Types	By duration     By traffic volume

#### **REPORTING**

Whether it is real-time monitoring of network activity or tracking the usage of previous Wi-Fi users, network administrators need the appropriate tools at their disposal to increase efficiency and reduce workload. The Edgecore Controllers have an extensive set of logging and reporting features that allow network administrators to easily find any information related to the wireless network.

The built-in system dashboard provides a quick overview of the current system status, along with graphical reports of network traffic and system performance. In addition, there is a simple interface for viewing online devices and their associated detailed statistics, including but not limited to the roles they belong to, enforced network policies, and packets transferred.

Alongside network monitoring, the Edgecore Controller also performs detailed logging of all network activity. For example, the User HTTP Web Log allows network administrators to track users who visited malicious websites, while the DHCP Lease Log can assist in troubleshooting clients who cannot receive an IP address. Lastly, the Configuration Change Log shows administrators which settings have been modified in the past, in case there are configuration errors that need to be reverted.

SYSTEM & NETWORK STATU	S
System Dashboard	<ul><li>Yes</li></ul>
Graphical System	• Yes
Performance Reports	
Traffic Volume Reports	<ul><li>Yes</li></ul>
System Process Monitor	<ul><li>Yes</li></ul>
Online Device Monitoring	⋆ Yes
Active Sessions List	⋆ Yes
Configurable SYSLOG Severity	* Yes
SMTP (E-mail) Notifications	<ul><li>Yes</li></ul>
Multiple Concurrent E-mail	* Yes
Notification Receivers	* Te5
NETWORK ACTIVITY LOGS	
System Log (SYSLOG)	◆ Yes
CAPWAP Log	<ul><li>Yes</li></ul>
Configuration Change Log	• Yes
RADIUS Server Log	<ul><li>Yes</li></ul>
User Events Log	• Yes
User HTTP Web Log	• Yes
Firewall Log	• Yes
DHCP Server/Lease Log	• Yes
PMS Interface Log	• Yes
On-Demand Billing Report	• Yes
AP Status E-mail Notification	• Yes
Logging to External FTP	* Yes
Configurable Logs & Reporting Intervals	• Yes

# **SPECIFICATIONS**

SYSTEM CAPACI	TY* <sup>1</sup>	
Managed APs	* Up to 10	
Local Accounts	• Up to 2,000	
On-Demand	* Up to 2,000	
Accounts	Ψ Ορ το 2,000	
HARDWARE SPECIFICATIONS		
Form Factor	* Desktop	
Dimensions	• 19.0 cm x 13.3 cm x 3.3 cm	
(W x D x H)	. 0.03   (1.04   )	
Weight	* 0.82 kg (1.81 lbs)	
Power	DC Input: 12V / 1A (Power adapter	
	included)	
	* WAN: (1 or 2)*2 x	
	10/100/1000Base-T Ethernet, Auto-	
Interfaces	MDIX, RJ-45	
interraces	• LAN: (4 or 3)*2 x 10/100/1000Base-T	
	Ethernet, Auto-MDIX, RJ-45	
	• USB: 1 x USB 3.0	
LED Indicators	* Power	
	* Status	
Buttons	* Power	
	• Reset	
LCD Display	* No	
	Operating Temperature: 0°C (32°F)	
Environmental	to 40°C (104°F)	
Conditions	Operating Humidity: 5% to 95%	
	non-condensing	

<sup>\*1:</sup> Capacity limits may vary depending on configuration parameters

<sup>\*2:</sup> Ethernet port allocation option for different deployment scenarios